


**SPLIT RANGE  
CONVERTER**

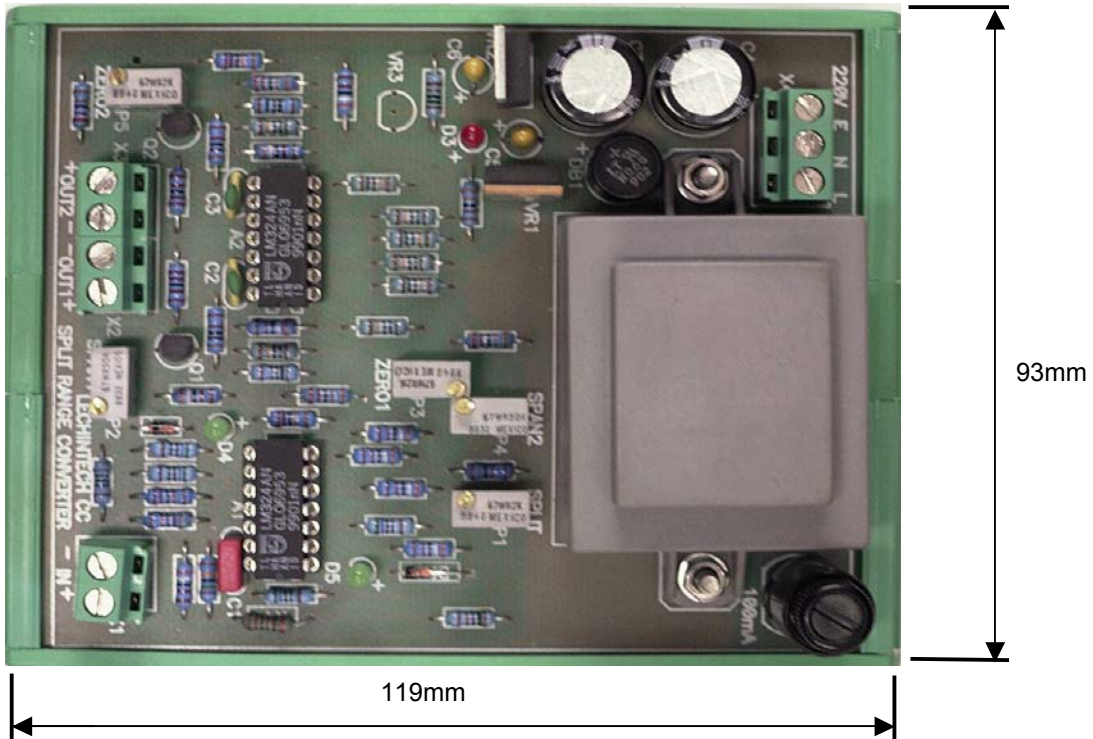


**Technical data**

**SPLIT RANGE CONVERTER**


input signal range	4 to 20 mA
output 1 signal range	4 to 20mA
output 2 signal range	4 to 20mA
input impedance	100 ohms
output 1 load	not greater than 500 ohms
output 2 load	not greater than 500 ohms
split range	30% to 70%
power supply	220v Vac 3VA
dimensions	W119mm X D93mm X H58mm
weight	350g
housing	Sauro DIN rail mounted boat
guarantee period	1 year from dispatch

**SPLIT RANGE CONVERTER  
INPUT/OUTPUT GRAPH**


**DUAL OUTPUT**

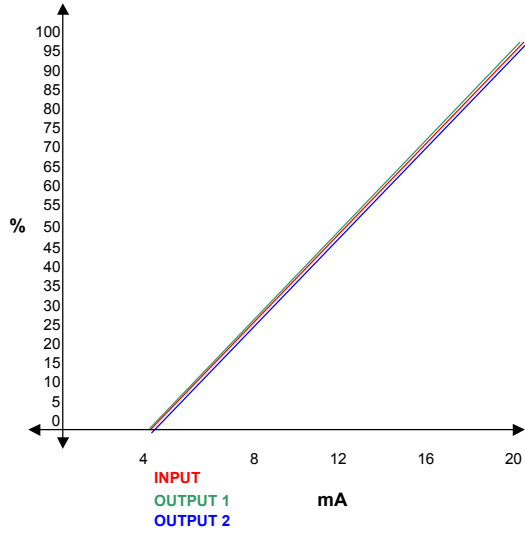

**50/50 SPLITTER**

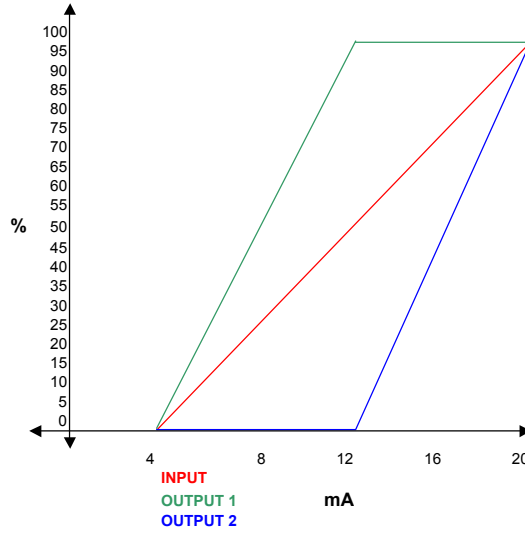

**MINIMUM 30/70 SPLITTER**

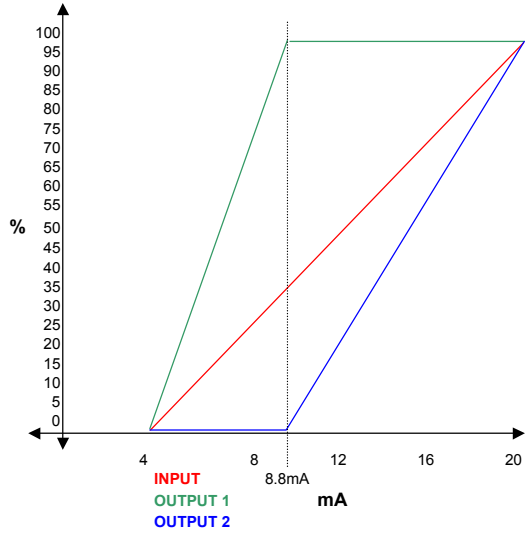

**MAXIMUM 70/30 SPLITTER**

